

LOWRANCE®

e-card STANDARD MAPPING

Elite Ti²

INSTRUCTIONS

Make sure that the unit is updated with the latest software version!

Older software versions may not follow the same instructions.

Go to the link below to update the Unit with the latest Software Version

<https://www.lowrance.com/downloads/>

BEFORE INSERTING THE E-CARD INTO THE UNIT

Power ON the Unit, and accept the warning.


Press the PAGES Button, and select Chart.

Insert the E-Card into the Unit

If Unit does not prompt with a “Loading Maps” message at the bottom.

Please check out our FAQ about Unit Not Reading E-Card.

Once Unit is finished “Loading Maps” (typically 5-15 seconds).

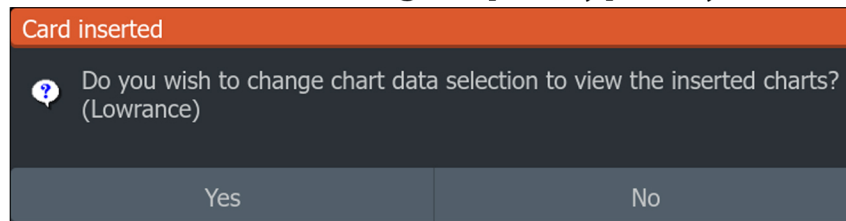

Select YES for the Lowrance Chart Source.

If the unit does not load this prompt continue with these settings:

Select the MENU button in the top right corner of the Unit Screen.

Select Options, then change the Chart Source to Lowrance.

Once the Chart Source is set to Lowrance

Select the MENU button in the top right corner of the Unit Screen.

Select Options, then Select Chart Options.

Turn the Shaded Relief tab ON (an orange light will appear on the tab).

Please see our FAQ about how the Chart Detail effects the E-Card.

Any Questions or Support, please call (985) 898 - 0025